


STATUS (SML 1131/DCP)



Terminals

6
0
K
J
L
2
P
M
9
N
1
REPLACES 5800 / DC


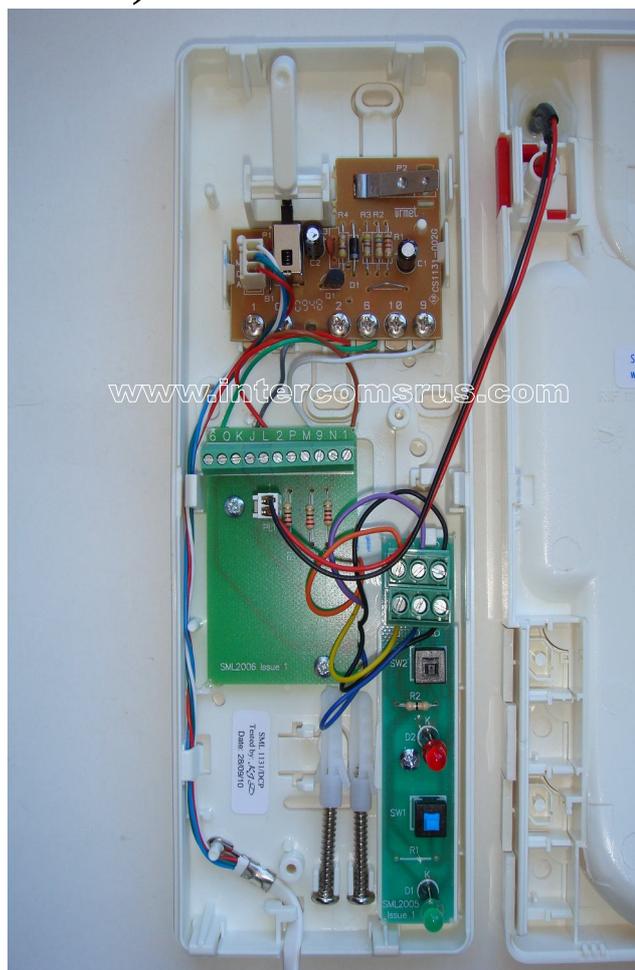


IMPORTANT NOTE :

- 1) Before replacing the handset make note of the wires to each terminal on the existing unit (an easy way is to cut each core off leaving a piece of the insulation in place with colour visible) twist unused cores together (so you know they are not used, do not short them out).
- 2) Some older systems will have cable with one coloured core and a solid white core in this case mark each core with a marker or tape.
- 3) Some systems may have loop on wiring, you will have 2 cables into your handset (make sure any joins remain, as these may be serving other flats on the system).

WIRING DETAILS

SML-1131/DCP Telephone Handset

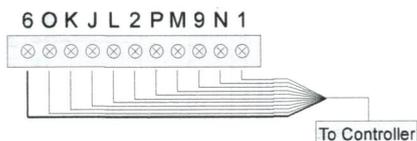

- 6 White of Blue & White of Orange
- O Blue of Red
- K White of Slate
- J Slate of White
- L Brown of White
- 2 Orange of White
- P Red of Blue
- M White of Green
- 9 Green of White
- N White of Brown
- 1 Blue of White



NOTE : There are many different versions of the handsets for STATUS (SML), so a picture of the insides and terminal markings is the best way to get a positive identification.

| | |
|---------------|--|
| SML-1130/1 | Standard Handset (Mechanical Buzzer) + 1 Button |
| SML-1130/N | Urmet Modified Handset to N |
| SML-1130/NI | Urmet Modified Handset to NI |
| SML-1130/NID | Urmet Modified Handset to NID (Mechanical Buzzer) |
| SML-1130/NIDP | Urmet Modified Handset to NIDP |
| SML-1130/T | Urmet Modified Handset to T (Mechanical Buzzer) |
| SML-1130/TSL | Urmet Modified Handset to TSL (Mechanical Buzzer) |
| SML-1131/1 | Standard Handset (Electronic Tone) + 1 Key |
| SML-1131/N | Urmet Modified Handset to N |
| SML-1131/NI | Urmet Modified Handset to NI (Electronic Tone) |
| SML-1131/NID | Urmet Modified Handset to NID (Electronic Tone) |
| SML-1131/NIDP | Urmet Modified Handset to NIDP (Electronic Tone) |
| SML-1131/CNID | Urmet Modified Handset to CNID |
| SML-1131/T | Urmet Modified Handset to T (Electronic Tone) |
| SML-1131/DC | Urmet Modified Handset to DC (Electronic Tone) |
| SML-1131/DCP | Urmet Modified Handset to DCP (Electronic Tone) |
| AT-PID | Telephone c/w Privacy Button, Indicator & Door Open |
| AT-PID/C | Telephone c/w Privacy Button, Indicator, Door Open & Concier |